

MorganTecnica

FOX 2 Δ
PRO 80

Automatic spreader

ERGONOMIC DESIGN AND HIGH PERFORMANCE FOR INTENSIVE PRODUCTIONS

The new **Fox 2 Δ 80 PRO** has everything that the most demanding customer can desire in a single spreader: reliability, speed, accuracy, versatility and easy use.

A sturdy structure is capable of sustaining the pace of intensive productions.

Important ergonomics was built into the machine design to safeguard the operator's well-being.

A special system for fabric roll loading facilitates feeding the machine.

The Fox 2 Δ 80 PRO is suitable for preparation of flat spreads or regular and irregular step lays.

Fox 2 Δ 80 PRO optimum performance is especially showcased in productions with elastic or light fabrics.

AUTO-DIAGNOSIS SYSTEM

INTUITIVE INTERFACE

TENSION-FREE DEVICE


The new interactive vertical touch PC is equipped with an intuitive software that speeds up and eases the operator's activities, whether it's during the configuration or spreading process.



Photo for illustration purposes only



FOX 2 Δ
PRO 80

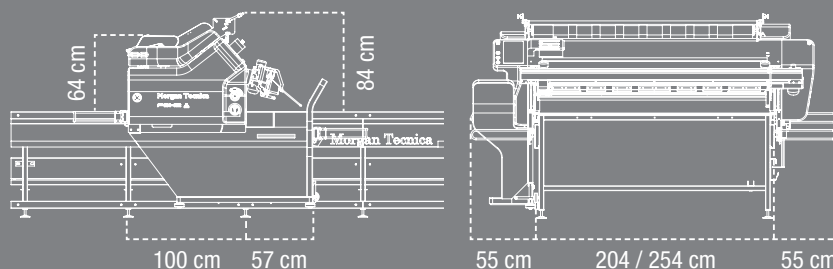

PRODUCTIVITY

- Suitable for preparation of flat spreads or irregular and regular step lays
- Spread from fabric roll or open folded fabric
- Interfacing with Mastermind
- Traction system with 4wd: high acceleration

SPREADING QUALITY

- Tension-free electronic device
- Belts turret design
- Automatic edge alignment by photocells
- Bi-directional cutting device with adjustable speed

CONTROL

- Fabric consumption report
- Wi-fi connection
- Anomalies auto-diagnosis system
- Suitable for remote support

ROI AND RUNNING COSTS

- Industry 4.0 technology
- Reduces fabric consumption: lay headings management
- Time saving: easy setting
- Low cost maintenance: preventive maintenance kits

USABILITY

- Interactive computer touch
- Store endless amount of spreading files
- Automatic overlap management

RELIABILITY

- 1 year warranty + up to 24 months of extension warranty available as an optional*
- Preventive maintenance

TECHNICAL SPECIFICATIONS

• Spreading modes:	Face up, Zig Zag, Folded
• Max. spreading speed:	100 m/min
• Effective spreading width:	180, 230 cm
• Max. roll weight:	80 Kg
• Max. roll diameter:	60 cm
• Max. lay height:	20 cm (15 cm with folding device)
• Average power consumption:	3 kW
• Installed electrical power:	3 kW
• Voltage / Frequency:	400 V 3Ph+N 50/60 Hz
• Environment temperature:	10° - 40°C
• Humidity (at 30° without condensation):	< 95%



Watch the FOX 2 Δ video

www.morgantecnica.com
marketing@morgantecnica.com

ITALY / INDIA / CANADA / HONG KONG / USA / VIETNAM

