


RACING®

We offer the best quality



Can Be Attached On Every Brand and Model
RACING ATTACHMENT GENERAL CATALOGUE

切刀系列產品 參照 第12頁
Cutter Series refer to Page12

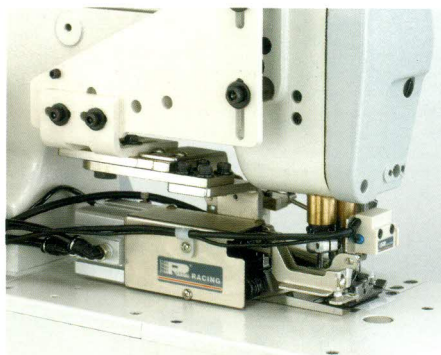


TCA -L25 /C




EFV

鬆帶機系列產品 參照 第14頁
Tape Feeder Series refer to Page14

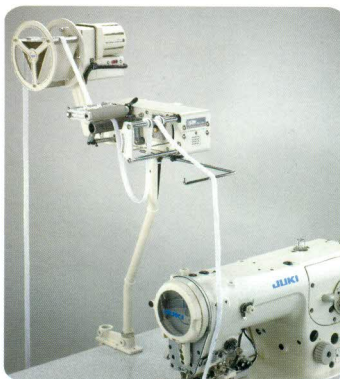

TFU 16-3 /UT

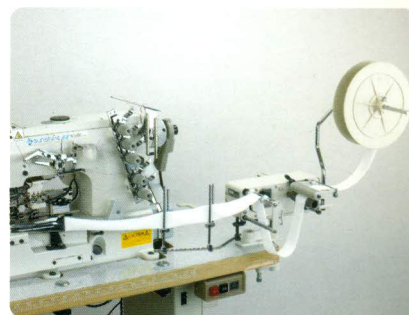

TFS 26-3

目錄

CONTENTS.

電腦送帶機系列

COMPUTERIZED METERING DEVICE

MC M8	01
MC E8U	02
MCA 18	03
MC S6	04
MC 18	

拖輪系列

PULLER ATTACHMENT

PS	07
PL	
PT	08
PY	
PF	
PG	09
PR	
PO	
PK	
PW	10

切刀系列產品

CUTTER SERIES

TCM	12
TCA	
ECV	
EFV	

車縫輔助裝置系列

SUPPLEMENTARY DEVICE

MDL	13
MDK	
TFU	14
TFS	
K-1	
RTP/RTF	15
AF	
S-1/P-1	

MC M8 系列

微電腦全方位送帶機(主機與控制盒分離型)

Versatility Tension type computerized metering device

(The main unit is separate from the control box and display panel)

全方位功能"隨心所欲"

VERSATILE "TO MEET ALL YOUR NEED" FUNCTION



輕薄短小 Compact Size



高效率
High Efficiency



高品質產品
High Quality



提高利潤
Increase Profit




全方位汎用型
Universal Versatility




MC M8U 上送 UPPER FEED


例一：MC M8U-Z(人字車)
EXAMPLE 1 : MC M8U-Z(ZIG-ZAG)

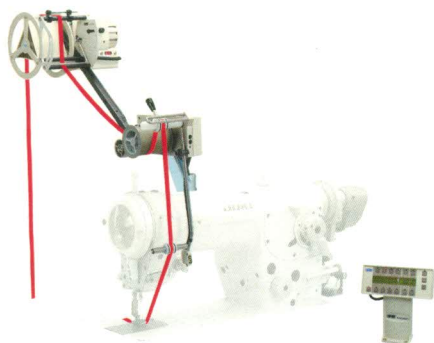

例二：MC M8U-C(飾縫車)
EXAMPLE 2 : MC M8U-C(COVERSTITCH)

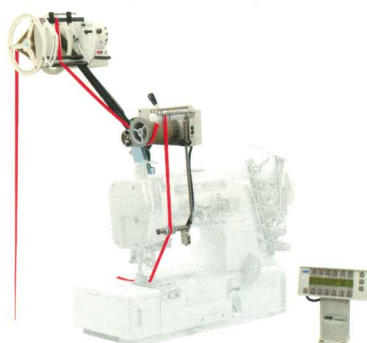


例三：MC M8U-K(包縫車)
EXAMPLE 3 : MC M8U-K(OVERLOCK)




MC M8B 下送 BOTTOM FEED


例一：MC M8B-Z(人字車)
EXAMPLE 1 : MC M8B-Z(ZIG-ZAG)

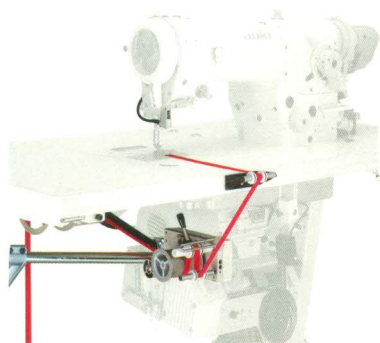

例二：MC M8B-C(飾縫車)
EXAMPLE 2 : MC M8B-C(COVERSTITCH)

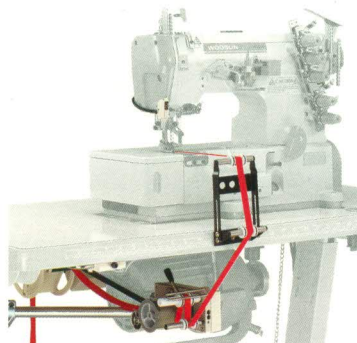


例三：MC M8B-K(包縫車)
EXAMPLE 2 : MC M8B-K(OVERLOCK)



MC M8S 側送 SIDE FEED

例一：MC M8S-Z(人字車)
EXAMPLE 1 : MC M8S-Z(ZIG-ZAG)

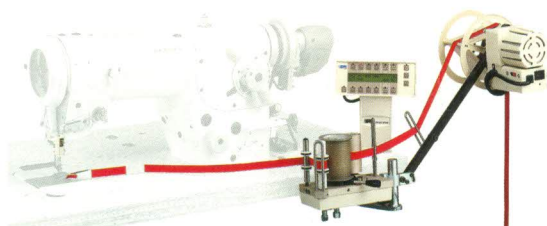


例二：MC M8S-C(飾縫車)
EXAMPLE 2 : MC M8S-C(COVERSTITCH)




MC E8U 系列 上送專用，微電腦全方位送帶機(主機與控制盒合併型，安裝簡便)。 Tension type computerized metering device for upper feed only. (The main unit, control box and panel are all together in one unit)

MC E8U 上送 UPPER FEED

例一：MC E8U-Z(人字車)
EXAMPLE 1 : MC E8U-Z(ZIG-ZAG)

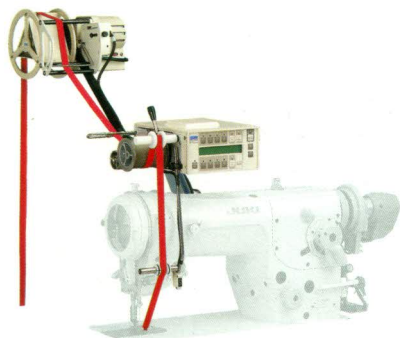

例二：MC E8U-C(飾縫車)
EXAMPLE 2 : MC E8U-C(COVERSTITCH)



例三：MC E8U-K(包縫車)
EXAMPLE 3 : MC E8U-K(OVERLOCK)



配件說明

Description of accessory for MC series



- SY ● 安裝於皮帶輪端的計數器，計算車縫的針數自動換段(選擇配件)。
● Fits on the machines hand wheel to control automatic section changes(Optional Parts).



- E10 ● LED + 手動換段(選擇配件)
體積小，操作簡便。
E10 ● LED and manual section change
(Optional Parts) : This tiny display
shows the current section being
sewn and includes a switch for
manual section changes.



- E8 ● 膝動換段開關(標準配件)：工程換段用。
● Knee Switch(Standard) : For manual section changes.



- E9 ● 無張力開關
(人字車用、標準配件)
● Free Tape Function Switch
(For zig-zag machine only
and Standard Parts).



- E6-1 ● 懸吊無張力開關(飾縫車、包縫車用、選擇配件)
● Suspended switch for free tape function
(For coverstitch and overlock machines only and Optional Parts).



- E7-1 ● 踏板開關：壓腳自動提昇車專用(AK裝置、選擇配件)
● Pedal Switch : For free tape function. Only for with Auto Lifter
(AK Device and Optional Parts).

訂貨說明

Order guide

MC M8 U - Z / SY

1 2 3 4

- 1 ● 微電腦多功能鬆緊帶控制裝置機型代號：
● Model for Multi-Function Computerized Elastic Metering Device :

MC M8系列：微電腦全方位送帶機(主機與控制盒分離型)
MC M8 SERIES : Tension type computerized metering device for upper,
bottom, side or rear feeds.
(The main unit are separate from the control box and display panel)

MC E8U系列：微電腦上送型(主組機與控制板合併型，安裝簡便)
MC E8U SERIES : Tension type computerized metering device for upper
feeding only.
(The main unit, control box and panel are all together in one unit)

- 2 ● 分類：
● Feeding Type:

U : 上送
U : Upper Feeding
B : 下送
B : Bottom Feeding
S : 側送
S : Side Feeding

- 3 ● 車種：
● Machine Typel :

Z : 人字車
Z : Zig-Zag
K : 包縫車
K : Overlock
C : 飾縫車
C : Coverstitch

- 4 ● 配件：
● Accessory:

SY : 安裝於皮帶輪端的計數器(選擇配件)
SY : The Synchronizer Adapting on the Belt Pulley (Optional Parts)

規格表 Specifications

基座固定方式 Base Mounted place	車板 Table
工程設定 Program Set	8段 8 Section
記憶 Memory	26組 26 Mode
每針送帶量 Feed Range/PER STITCH	0.4~4.0mm
最高速度 MAX. Speed	可配合各種縫紉機轉速 Unlimited
SY計數器 SY Stitch Counter	選擇配件 Optional
膝動開關 Knee Switch for Manual Section Change	○
手動換段 Section Change by Finger	選擇配件 Optional
LED 換段指示燈 LED Indicate Lamp	○
無張力送帶 Free Tension	○
送帶寬度最寬 MAX. Feeding width	64mm(2 1/2" inch)
電源 Power	AC100~240V自動切換 AC 100~240V AUTO SWITCHING

※MC M8, MC E8 系列產品說明
※MC M8, MC E8 SERIES-PRODUCT SPEC.

MCA 18系列

自動切帶及送帶的功能，有27組程式及記憶，功能超強。
Auto-Cutting and Re-Insert. It can Reach Different Sewing Purpose by Powerful Multi-Function with 27 Program Memory.

- 附有切帶裝置：可縫製各種鬆緊帶製品，特別是縫製圓筒型製品的接頭，車縫中鬆緊帶可以在壓布腳前自動快速切斷再重疊車縫，接頭平整美觀，車縫前後，壓布腳自動提升鬆緊帶，自動送到壓腳下待用。
- With Cutting Device : To any Elastic Attaching Sewing, Special for Connecting the Circle Sewing. During the Sewing Operation, It Can Auto Cut the Tape Fast in front of the Presser Foot for Covering Sewing to Make the Flat and Beautiful Sewing. In the Beginning and After Finish Sewing The Presser Foot will be Lifted Automatically. And the Elastic will be Re-Insert Into the Presser Foot to Stand By.

● 泛用型各種廠牌機型均可安裝。

● Universal mount can easily be set-up on any machine.


● 適用於泳裝、韻律裝、內衣褲...等，各種高級產品均可輕易完成。

● Ideal for attaching elastic to necks, leg openings of swimsuits or women's panties, leotards, underwear, briefs and sportswear.


MCA 18K-38 包縫車用 MCA 18K-64 FOR OVERLOCK



TR 鬆線裝置：MCA 18K專用(選擇配件) Thread Release Device : For MCA 18K Only (Optional Parts) MCA 18K-38/ TR MCA 18K-64/ TR

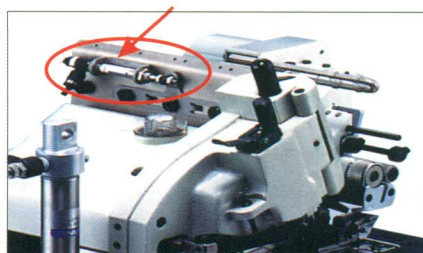

- 縫畢時可將車針的縫線放鬆便於切斷
- Release the thread for cutting thread easily after sewing.

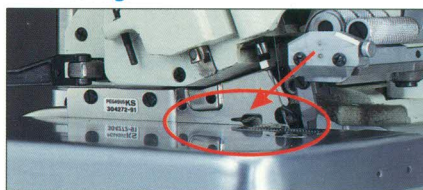


- 適用於有安裝吸入式線頭切斷裝置的包縫車
- Suitable for Overlock with Chain Cutter and Vacuum

MCA 18Z-19 千鳥車用 FOR ZIG-ZAG



特殊機型・訂貨生產 Special Order Only

範例
EXAMPLE

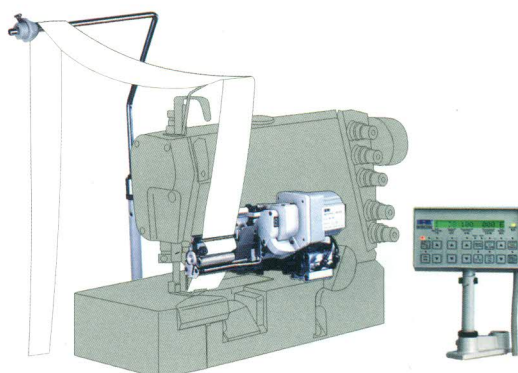


MC S6 系列


SERIES

- 體積小，安裝簡便。
- Compact Size Allows easy installation.
- 一般離合器馬達及定位馬達之縫紉機均可使用。
- No Matter The Motor is Clutch or Position.


MC S6Z-57 千鳥車用
FOR ZIG-ZAG

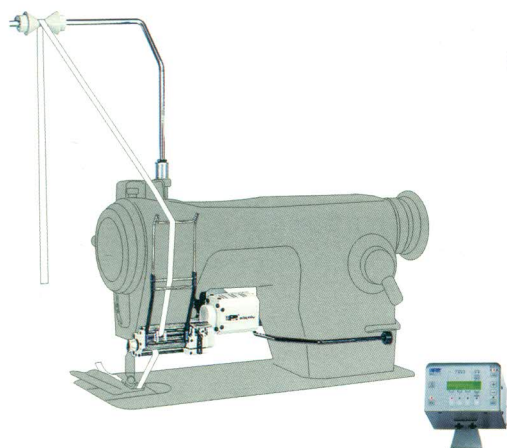


MC S6K-57 包縫車用
FOR OVERLOCK

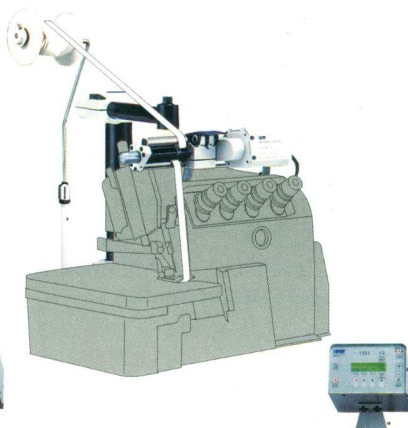


MC S6C-57 飾縫車用
FOR COVERSTITCH

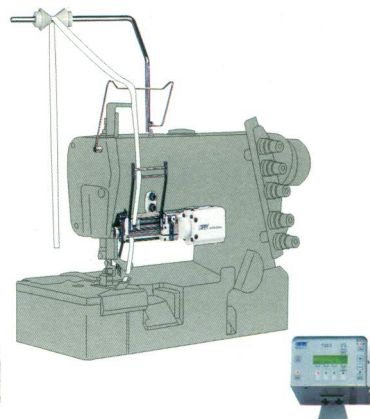

MC S6B-57 下送用
FROM BOTTOM FEED

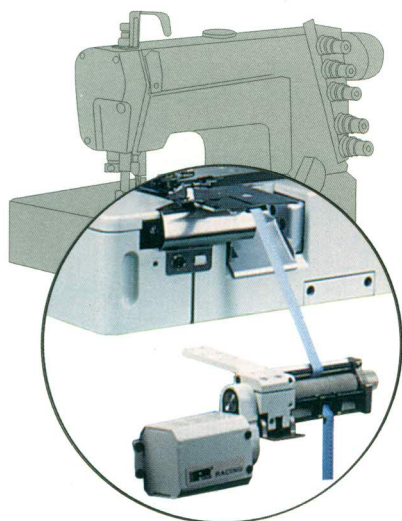

MC S6S-57 側送用
FROM SIDE FEED

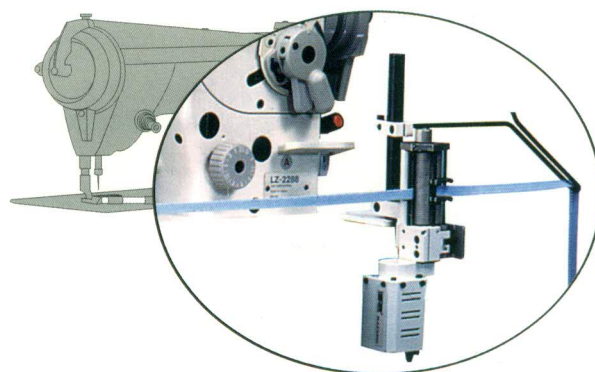


MC 18 系列


SERIES

有27組程式及記憶，功能超強，可達成各種不同需求的車縫。
27 Program Memory. It can Reach Different Sewing Purpose by Powerful Multi-Function.

MC 18Z-57 千鳥車用
FOR ZIG-ZAG

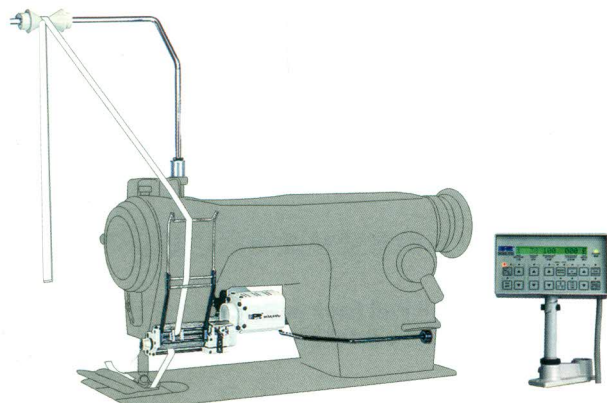


MC 18C-57 飾縫車用
FOR COVERSTITCH

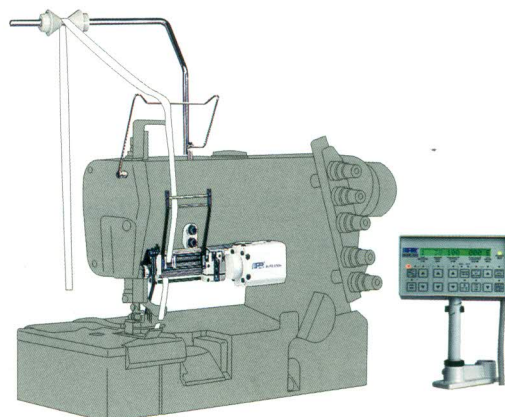

※請參照第5、6頁產品說明
※ PLEASE REFER TO PRODUCT SPEC. PER P.5 & P.6

MC S6 · MC 18 · MCA 18 系列 配件說明

SERIES Description of accessory

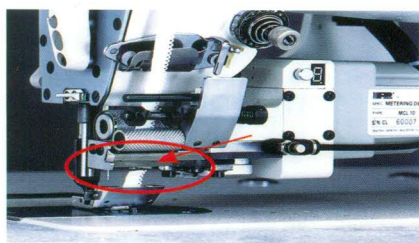


自動切帶及自動送帶

Auto Cut & Re-Insert

●縫製圓筒型製品的接頭，車縫中鬆緊帶可以在壓布腳前面自動快速切帶再重疊車縫，接頭平整美觀。車縫前後，壓布腳自動提升鬆緊帶，自動送到壓腳下待用。

●For Connecting the Circle Sewing. During the Operation, It Can Automatically Cut the Tape Fast In Front of the Presser Foot for Covering Sewing to Make It Flat and Beautiful. In the Beginning and After Finish Sewing, The Presser Foot will be lifted Automatically. And the Elastic will be Re-Insert to the Presser Foot to Stand By.

MCA 18 系列
MCA 18 SERIES

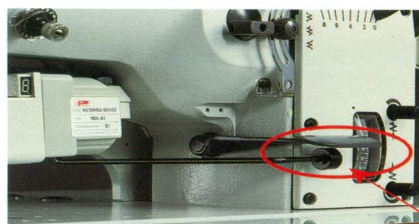

鬆緊帶可以配合倒針回拉

Pull Back the Elastic Tape during Reverse Sewing

●手動、自動、觸動、倒針時鬆緊帶均可自動回拉。

●The Device Can Be Pull Back no matter Auto or Manual Reverse Sewing.

MC S6Z, MCA 18Z, MC 18Z 系列
MC S6Z, MCA 18Z, MC 18Z SERIES




安裝於皮帶輪端的計數器

The Synchronizer Adapting on the Belt Pulley

●計算車縫針數、自動換段

●Stitch Counting for Section Change Automatically


MC S6, MCA 18, MC 18 系列
MC S6, MCA 18, MC 18 SERIES

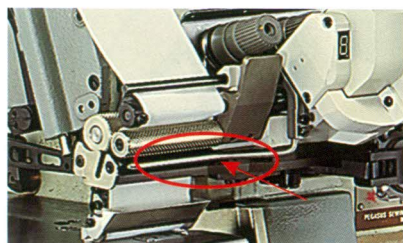

手動換段

Section Changed by Finger

MCA 18 系列
MCA 18 SERIES

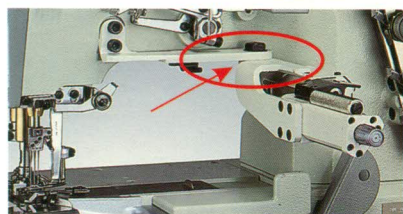

可活動基座

With Moveable Bracket


MCA 18K(MC 18Z, MCA 18Z 選擇配件)
MCA 18K(MC 18Z, MCA 18Z Optional Parts)



膝動換段

Section Changed by Knee

MC S6, MC 18 系列
MC S6, MC 18 SERIES

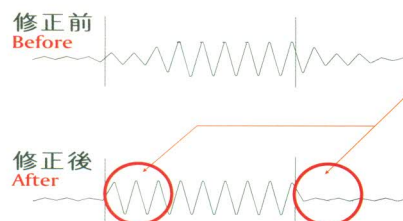

換段修正

Pre-Tension

●鬆緊帶預送及回拉：在換段時可自動偵測要預送或回拉鬆緊帶。可縫製出明確的換段效果。

●Pull Back And Release The Elastic Tape: It will Pull back or Release the Elastic Tape by Sensor during Section Change. There is a Brief Effect between Sections.

MC S6, MCA 18, MC 18 系列
MC S6, MCA 18, MC 18 SERIES

MC S6 · MC 18 · MCA 18 系列 訂貨說明

SERIES Order Guide

MCA 18 Z - 19 JUKI LZ2280N-7

1 2 3 4 5

- 1 ● 微電腦多功能鬆緊帶控制裝置機型代號：
● Model for Multi-Function Computerized Elastic Metering Device :
- MC S6：體積小，有六段可供選擇不同鬆緊度，送帶精確度高，各種高級產品均可輕易完成。
MC S6 : Compact Size. Up to 6 Separate Sections are available with Precise Tension Control. Easy to Complete the quality Perfectly.
- MCA 18：附自動切帶及送帶的功能，有27組程式及記憶，其中有5組程式可設定18段，22組可設定9段不同鬆緊度，功能超強，可達成各種不同需求的車縫。
MCA 18 : 27 Program Memory With Auto-Cutting and Re-Insert. 5 Program is for 18 Section and 22 Program is for 9 Section. Can Reach Different Sewing Purpose by Powerful Multi-Function.
- MC 18：有27組程式及記憶，其中有5組程式可設定18段，22組可設定9段不同鬆緊度，功能超強，可達成各種不同需求的車縫。
MC 18 : 27 Program Memory. 5 Program is for 18 Section and 22 Program is for 9 Section. Can Reach Different Sewing Purpose by Powerful Multi-Function.

- 2 ● 分類：
● Sewing Machine Type:
- Z：千鳥縫用 U：泛用型（MC S6專用）
Z : Zig-Zag U : Universal Model (Only for MC S6)
- K：包縫車用 B：下送（MC S6專用）
K : Overlock B : Bottom Feeding (Only for MC S6)
- C：飾縫車用 S：側送（MC S6 專用）
C : Coverstitch Machine S : Side Feeding (Only for MC S6)
- 配件：
● Accessory:
- TR：包縫車用 鬆線裝置：適用於包縫機，裝有吸入式線頭切斷裝置，縫畢時可將縫線放鬆便於吸入線頭（選擇配件）
TR : Release Device : Suitable For Overlock With Chain-Cutter and Vacuum. It Can Suck the Thread Easily after finishing the Sewing. (Optional Part)
- SY：安裝於皮帶輪端的計數器
SY : The Synchronizer Adapting on the Belt Pulley
- 3 ● 送帶寬度(最大)(inch)：
● Feeding Width (MAX)(inch) :
- 19 : 19mm(3/4")
38 : 38mm(1 1/2")
57 : 57mm(2 1/4")
64 : 64mm(2 1/2")
- 4 ● 按裝之針車廠牌機型
● Adaptable Sewing Machine Brand and Model
- 5 ● 自動切線及附屬配件編號
● Auto Thread Trimmer or Other Attachment Device Number

規格表

Specification List


機型 Model 功能 Function	MC S6系列 Series						MCA 18系列 Series		MC 18系列 Series	
	MC S6Z	MC S6K	MC S6C	MC S6U	MC S6B	MC S6S	MCA 18Z	MCA 18K	MC 18Z	MC 18C
基座固定方式 Bracket Mounted place	機頭 Machine Head	車板 Table	機頭 Machine Head	車板 Table			機頭 Machine Head			
自動切帶及送帶 Auto Cut and Re-Insert							○			
工程設定 Program Set	6段 6 Section						5組18段，22組9段 5 Program for 18 Section, 22 Program for 9 Section			
記憶 Memory							○			
送帶量 (mm) Feed Range (mm)/PER STITCH	0.4～3.8						0.4～3.6			
自動換段・計數器 Auto Section Change Counter							○			
最高速度 MAX. Speed	6000/rpm (鬆緊帶寬度小於40mm、針目每針小於3.5mm/針) (The MAX. Width for Tape is 40mm.The MAX. Stitch/Per. Is 3.5mm)									
膝動換段 Section Change by Knee	○								○	
手動換段 Section Change by Finger							○			
LED 換段指示燈 LED Indicate Lamp							○			
無張力送帶 Free Tension	○									
換段修正 Pre-Tension	○								○	
速度補償(可調式) Compensation (Adjustable)	○									
電源 Power	AC100~240V自動切換 AC 100~240V AUTO SWITCHING									

※MC S6, MC 18, MCA 18系列產品說明
※MC S6, MC 18, MCA 18 SERIES-PRODUCT SPEC.


提昇品質與產量必備利器

Necessary Attachment to Improve Efficiency and Upgrade the Quality

PS 小輪、單針、雙針車用(標準型)
FOR SINGLE OR TWIN NEEDLE(REGULAR) SMALL ROLLER

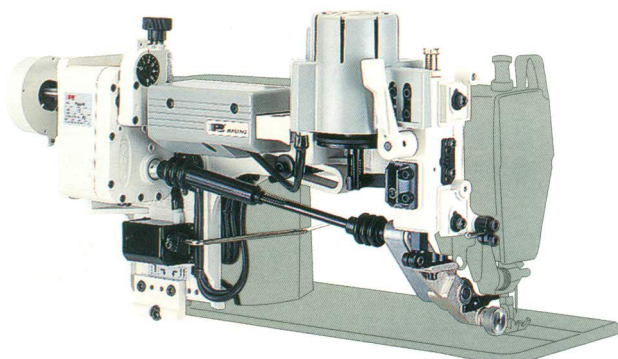


- 拖輪不用時可以提升
- Disengage roller if not needed

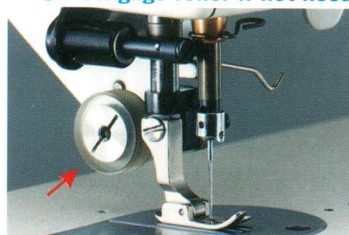


- 獨特設計，拖輪與車針距離超近，適合薄物，短距離及彎弧縫製。
- Extremely close pulling facilitates curve and short sewing on thin materials.

PL 單針、雙針車用(標準型)
FOR SINGLE OR TWIN NEEDLE(REGULAR)

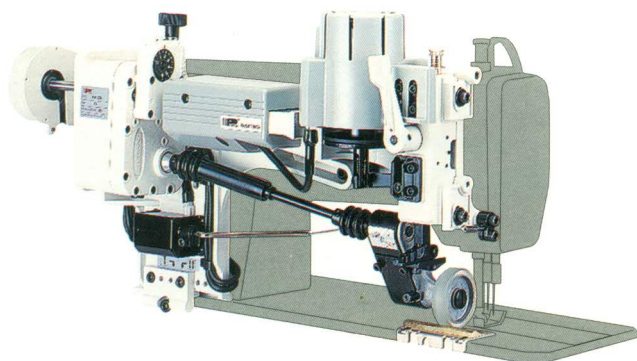


- 寬廣的操作空間
- With Large Space for Operation

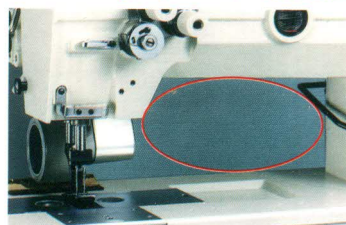


- 具有多種選擇性拖輪，能適應不同質料之車縫。
- With various optional rollers for different kinds of sewn materials.

PL-S1 飾縫車用
FOR FLAT BED COVERSTITCH

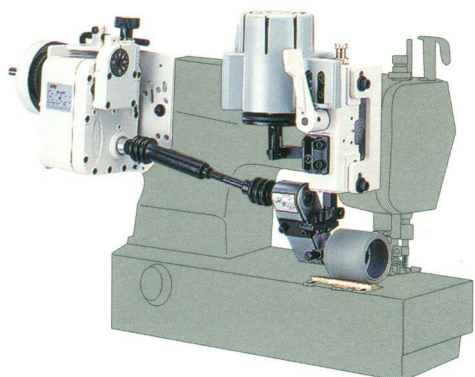


PL-S2 筒型飾縫車用
FOR CYLINDER BED COVERSTITCH

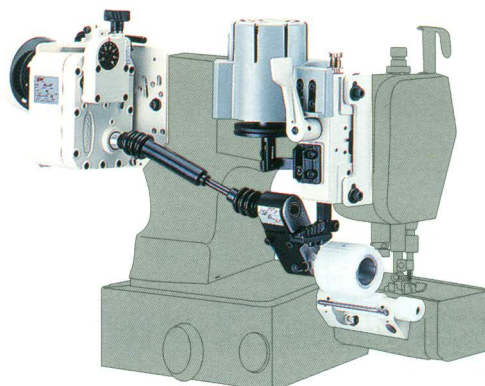


拖輪系列產品 PULLER ATTACHMENT

PT 單針、雙針車用・上下輪驅動(標準型)
FOR SINGLE OR TWIN NEEDLE WITH UPPER AND LOWER ROLLER(REGULAR)


PT-H 單針、雙針車用・上下輪驅動(厚物型)(變速機P-1)
FOR SINGLE OR TWIN NEEDLE WITH UPPER AND LOWER ROLLER(HEAVY DUTY)
(Transmission P-1)

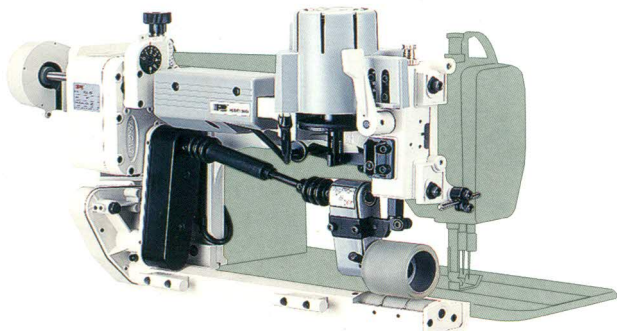



PT-L 長臂型・接受訂貨生產
FOR LONG ARM, AVAILABLE FOR CUSTOM-MADE

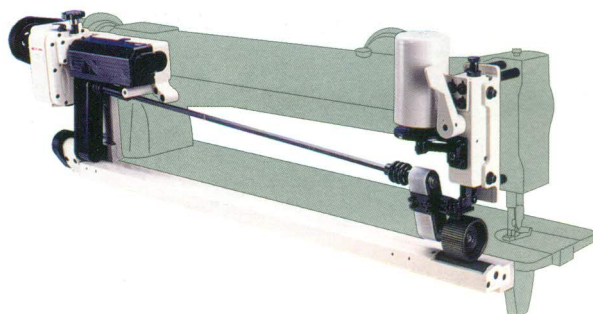

PY 單針、雙針車用・上下輪驅動
FOR SINGLE OR TWIN NEEDLE WITH UPPER AND LOWER ROLLER

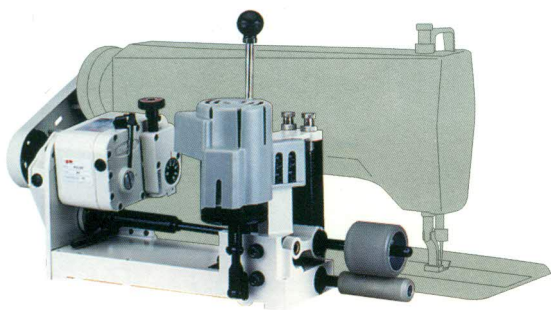



PY-C 飾縫車用
FOR COVERSTITCH

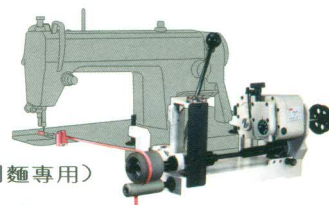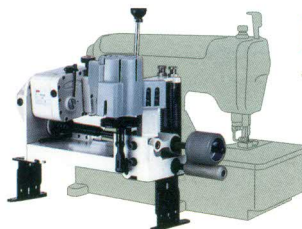

PY-SP 前拉式(意大利麵專用)
FRONT PULLER
(For spaghetti sewing)

PF 腕型車用(標準型)
FOR FEED-OFF-ARM (REGULAR)

PF-H 腕型車用(厚物型)(變速機P-1)
FOR FEED-OFF-ARM(HEAVY DUTY)(Transmission P-1)

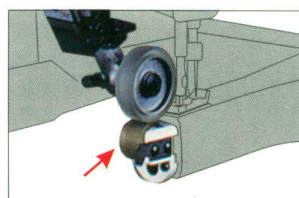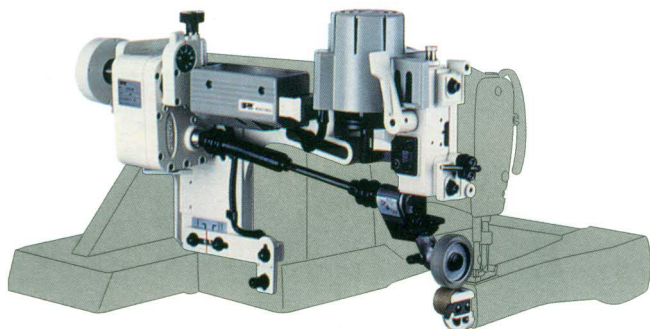

● 附下輪
● With lower roller

● 具有多種選擇性拖輪，能適應不同質料之車縫。


● With various optional rollers for different kinds of sewn materials.

PF-HB/ECV/AF

厚物，極厚物用皮帶式拖輪
BELT PULLER FOR HEAVY TO EXTREMELY HEAVY DUTY MATERIAL.


PF-RB/ECV/AF

一般布料用皮帶式拖輪
BELT PULLER FOR REGULAR FABRIC.

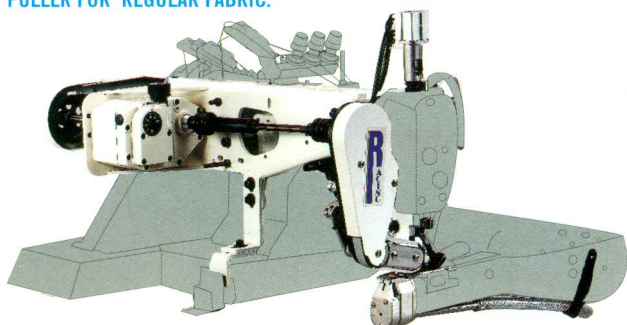


電動式自動切線裝置 Electronic chain cutter

ECV 一般腕型車用 for Feed-Off-the-Arm

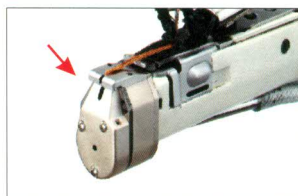

EFV 四針六線車用
for 4 NEEDLE/6 THREAD Feed-Off-the-Arm

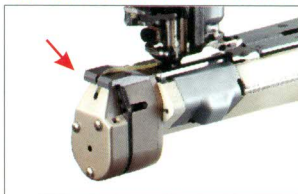

AF 氣壓式壓脚裝置(一般腕型車用)


Pneumatic pressure foot
(for Feed-Off-the-Arm)



※請參照第10、11頁產品說明
※ PLEASE REFER TO PRODUCT SPEC. PER P.10 & P.11

拖輪系列產品 PULLER ATTACHMENT

PG 包縫車用・小輪(薄物用) FOR OVERLOCK WITH SMALL ROLLER(FOR thin material)

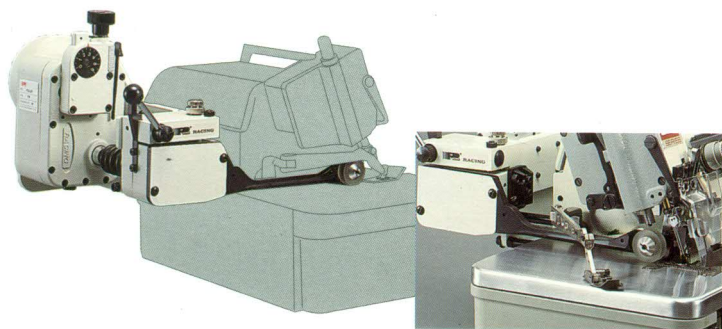


【本拖輪不能裝在附有水平或垂直式自動切線裝置的包縫車上
This puller is unable to install onto overlock machine with either vertical or horizontal automatic thread-chain cutter.

PG 系列所需要的基本空間 Space Limitation For PG Series


●例：

●Example：

JUKI	MO 3000,6000	SERIES
PEGASUS	EX,MX,M	SERIES
BROTHER	N,V	SERIES
YAMATO	AZ 8000,6000	SERIES
SIRUBA	757H	SERIES

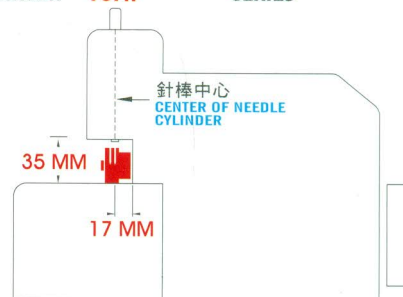


PR 包縫車用・皮帶後送(薄物用) FOR OVERLOCK WITH REAR DRIVE BELT(FOR thin material)

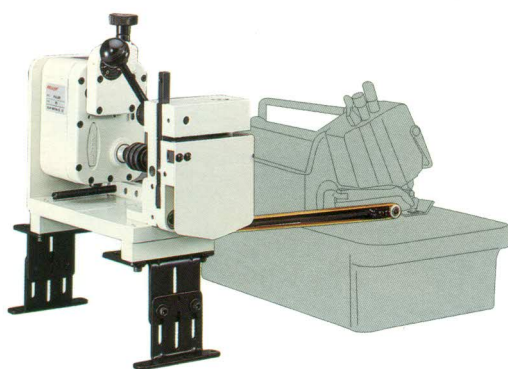

●不受空間限制，各種廠牌機型均可安裝。


●Suitable for every machine without space limitation.

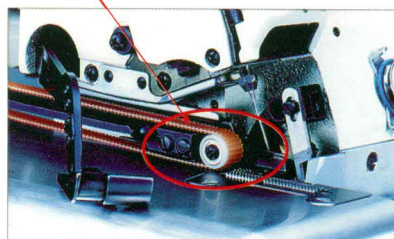

●獨特設計，皮帶與車針距離超近。
●適用於柔軟光滑、易皺之薄物。

●Close proximity of rear drive belt and needle improves sewing performance.
●Suitable for silky and easy-pucker thin materials.


PO 包縫車用・上皮帶送 FOR OVERLOCK WITH TOP DRIVE BELT

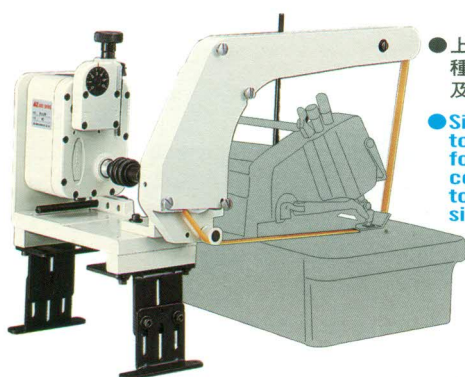

●上皮帶驅動，適用於各種編織毛領、多層堅澀及易滑之布料。

●Simple installation with top drive belt. Suitable for different knitting collars, multi-layer tough abrasive and silky materials.

PO-F 包縫車用(有領T恤專用)附氣動式包邊器 FOR OVERLOCK (FOR SEWING THE COLLAR OF KNIT SHIRT) WITH AIR TYPE FOLDER.

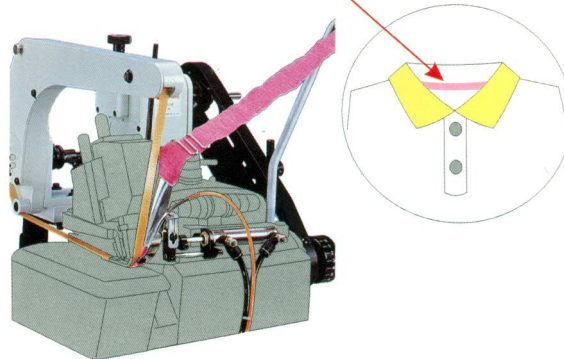

PK 包縫車用・上下輪驅動 FOR OVERLOCK WITH UPPER AND LOWER ROLLER




●適用於薄到極厚物直線縫製。
●Suitable for thin to extremely thick materials in straight sewing.

●浮出式
●Floating type

●下沉式
●Submerged type


PK-SP 前拉式(意大利麵專用) FRONT PULLER (FOR SPAGHETTI SEWING)

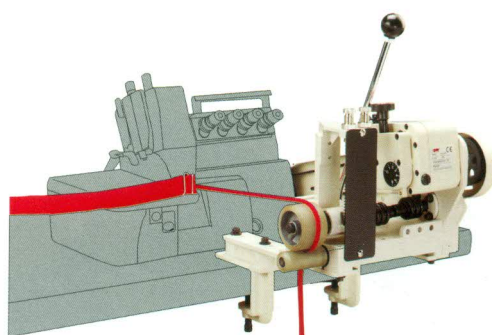


※請參照第10、11頁產品說明
※PLEASE REFER TO PRODUCT SPEC. PER P.10 & P.11

拖輪系列產品 PULLER ATTACHMENT

PW 手臂可動型盲縫車用(適用於潛水衣布料)
FOR BLINDSTITCH MACHINE WITH MOVEABLE ARM
(Suitable for diving-suit material)

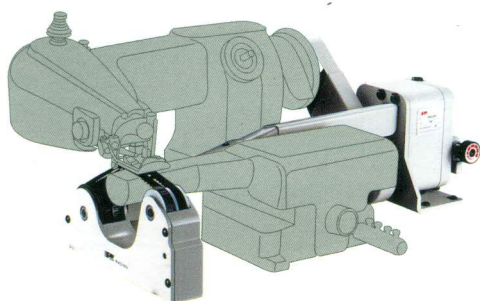



PW-L 手臂可動長臂型盲縫車用(適用於潛水衣布料)
FOR LONG ARM BLINDSTITCH MACHINE WITH MOVEABLE ARM
(Suitable for diving-suit material)

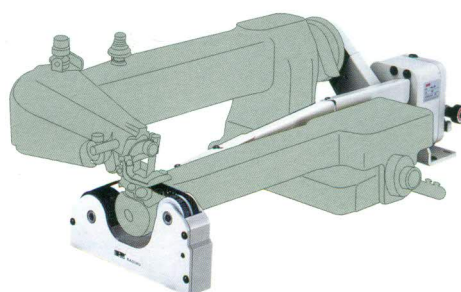

特殊機型・訂貨生產 Special Order Only

範例
EXAMPLE

JUKI DSC-246

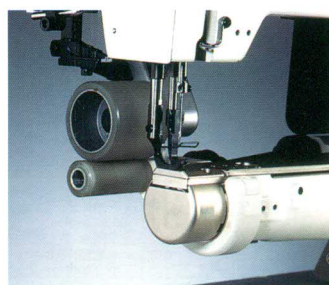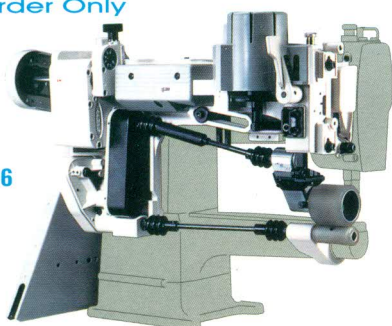

拖輪系列配件說明 Description of accessory for Puller Series

●PW、PR、PG、PO 不附此裝置電控提昇組
●The roller Lifter is not included for PW, PR, PG, PO.

拉布輪提昇組：當縫紉機壓布腳提昇或自動、手動回針時，拉布輪會同時提昇。
(附有二組輸入接點，可接收自動或觸動回針及壓布腳自動提升電磁鐵信號。)

Roller Lifter : The Roller Will be Lifted at the same time as the Presser Foot is lifted by Auto, Manual or Reverse Sewing.
(With two Plug sets which can connect with all Manual and Auto-Reverse system.)

- 允許此配件不在購買範圍，不需此配件時請在訂單上註明『不需拉布輪自動提昇組』，可節省採購成本。
- It allows you 『Not Buying the Roll Lifter』, in order to save your cost. Please indicate us on the order, if you do not need the Roller Lifter.

電動提昇組：
(標準配件)

Solenoid Roller Lifter :
(Regular Parts)




氣動提昇組：
(選擇配件)

Pneumatic Roller Lifter :
(Optional Parts)




E3 回針開關
E3 Reverse Switch

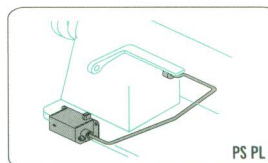


PS PL

E4 回針開關
E4 Reverse Switch

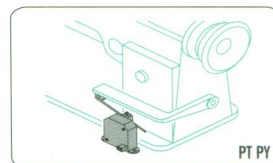


PT PY

E5 膝動開關
E5 Knee Switch

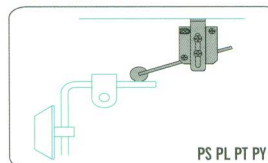

PS PL PT PY

E6 懸吊開關
E6 Suspension Switch

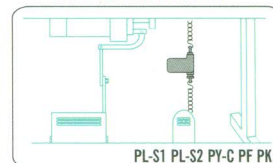


PL-S1 PL-S2 PY-C PF PK

B座：適用於針車背部有回針電磁鐵

B Base : For With Reverse Solenoid in the back of Sewing Machine.

例、

EX. PL- B P5535 BROTHER LT2-B842-403

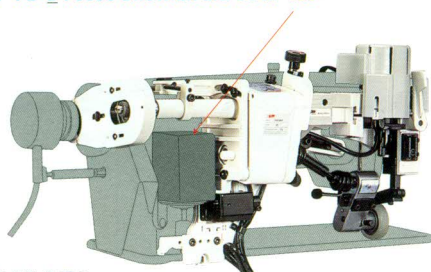


PS-B.PL-B.PT-B

AK移位組：適用於針車背部有壓布腳電動提升電磁鐵

AK Relocation Set : For With Auto-Lifter Solenoid in the back of Machine.

例、

EX. PL- AK P5535 JUKI DDL-555N-AK

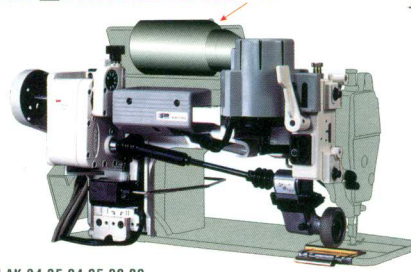

JUKI AK-34 35 84 85 88 89

※拖輪系列產品說明
※PULLER SERIES - PRODUCT SPEC.

拖輪訂貨說明
PULLER Order Guide

Table with 5 columns for model selection (1-5) and a detailed table for roller specifications (1-13) including model, machine type, and description. Includes sub-sections for roller material (PU, Steel, Plastic) and roller sizes (Diameter, Width).

拖輪規格表
PULLER Specification List


Table with 13 columns for roller specifications: Model, PS, PL, PL-S1, PL-S2, PT, PY, PF, PW, PG, PR, PO, PK. Rows include driven way, transmission type, roller type, roller length, speed, and power.

※拖輪系列產品說明
※PULLER SERIES - PRODUCT SPEC.


氣動式切帶系列產品 Pneumatic Tape Cutter Series

特殊規格接受訂貨生產
Special specification Available for custom-made

TCM-L25/F

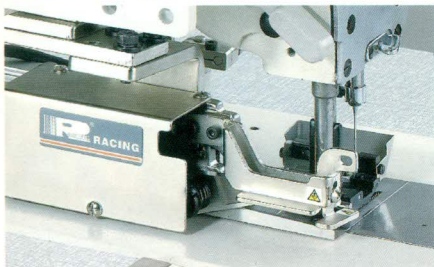

TCM-M45/C

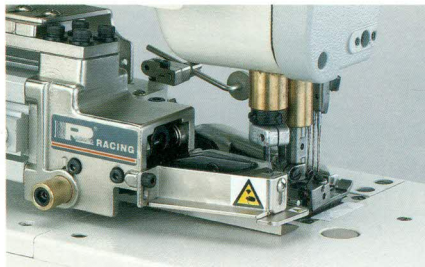

TCM-H50/C



訂貨說明

Ordre Guide

TCM - L25 / F
1 2 3

注意：此切刀裝置安裝位置會與拉布機或其他裝置產生干涉，不能同時安裝
Note : The mounting position of the tape cutter interfere with puller or other attachments, so they can't be installed on sewing machine at the same time.

1 ● 切帶方式 ● Tape Cutting Way

M :

- 觸動式切帶
- Manual Cutting Switch

E8 :
膝蓋觸動 (標準配備)
Knee switch
(regular parts)



E11 :
左手觸動 (選擇配備)
Left manual switch
(optional parts)




E12 :
右手觸動 (選擇配備)
Right manual switch
(optional parts)



A :

- 光電感測式自動切帶：可自動前、後切帶。
- 含膝蓋觸動式切帶 (選擇配件：左、右手觸動式切帶)
- Auto Cutting by Photo-sensor:
Cut before and finish sewing material
automatically.
Including Knee Cutting Switch
(Optional parts : Left or Right manual switch)

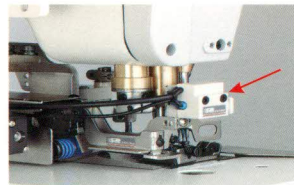


2 ● 切刀規格代號 ● Item No. of cutter

代號 Item No.	切帶寬度 mm Tape Width mm	切帶能力 Cutting Capability
L25	薄物用 Light 25 (刃長35) (blade 35)	1 層 Layer
M45	中物用 Medium 45 (刃長55) (blade 55)	4 層 Layers
H50	厚物用 Heavy 50 (刃長60) (blade 60)	10 層 Layers


* 切帶能力是以14盎司的布料(工作氣壓: 5kg/cm²)
為準，謹供參考，購買時要以實際布料狀況為準。
* Cutting Capability is based on 14oz of
material for your reference only. (Operating
pressure : 5kg/cm²) Please consider the
exact material condition before ordering.

3 ● 安裝針車 ● Sewing Machine type


- F ● 平床車用基座
- Bracket for Flatbed Machine

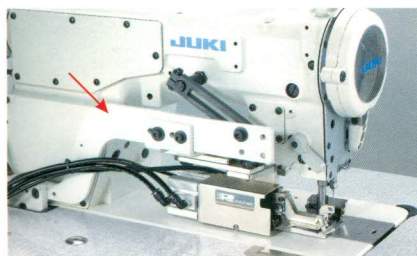

- C ● 飾縫車用基座
- Bracket for Coverstitch Machine

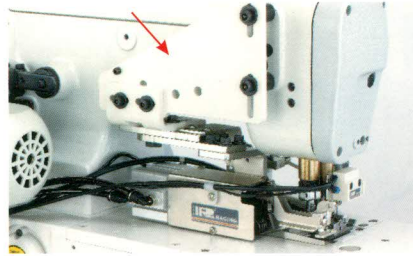


- 可活動基座 (標準配件)
- Moveable bracket (standard parts)

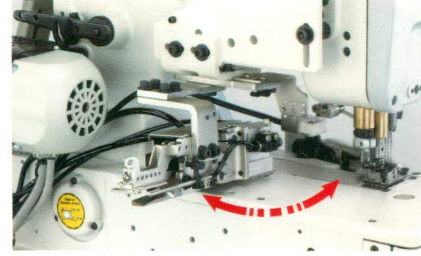


電動式切線系列產品 Electronic Chain Cutter Series

ECV

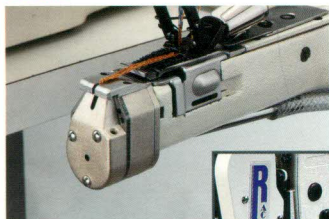

EFV

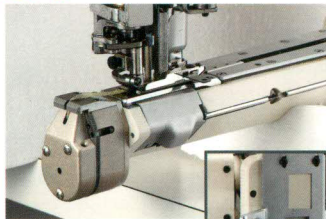

訂貨說明

Ordre Guide

ECV - BROTHER DA - 9280
1 2


- 1 ECV ● 一般腕型車用
- For regular Feed-Off-the-Arm
- EFV ● 四針六線腕型車用
- For Flat Seaming

- 2 ● 安裝針車廠牌機型
- Adaptable Machine Brand and Model


車縫輔助裝置系列 SUPPLEMENTARY DEVICE




MDL 31-2 千鳥車用專用型(基座固定於機頭上)
FOR SPECIFIC ZIG-ZAG (Base is mounted on the machine head)

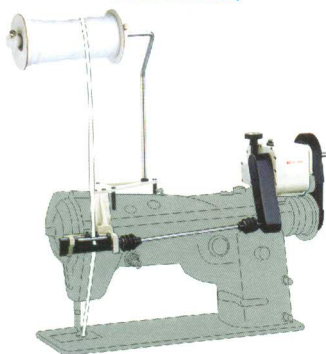


MDL 30-2 飾縫車用(基座固定於車板上)
FOR COVERSTITCH (Base is mounted on the table)

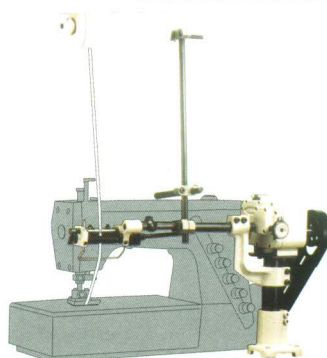

MDK 61-2 包縫車用專用型(基座固定於機頭上)
FOR SPECIFIC OVERLOCK (Base is mounted on the machine head)

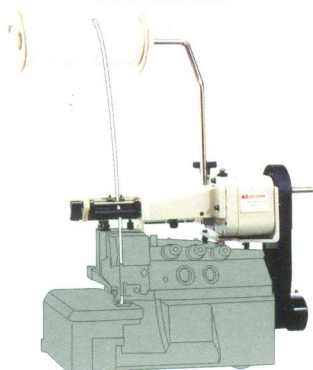

MDK 60-2 包縫車用(基座固定於車板上)
FOR OVERLOCK (Base is mounted on the table)

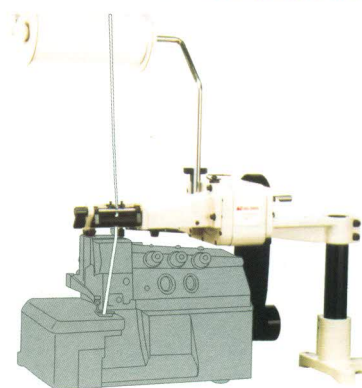

MD 訂貨說明 Order Guide

MD L 31 2 JUKI LZ2280N-7

1 2 3 4 5 6

1 ●機械式鬆緊帶調節機
●Mechanical Metering Device for Elastic Tape

2 ●分類:
●Sewing Machine Type:

L: 平床車用 K: 包縫車用
L: Flat Bed Machine K: Overlock

3 ●代號:
●Code:

30.60 基座固定於車板上
30.60 Base is mounted on the table.
31.61 基座固定於機頭上
31.61 Base is mounted on the machine head.

4 ●送帶寬度:
●Feeding Width:
2: 2"(50mm)
4: 4"(100mm)

5 ●安裝縫紉機廠牌機型
●Adaptable Sewing Machine and Model


6 ●自動切線及附屬配件編號
●Auto Thread Trimmer or Other Attachment Device Number

車縫輔助裝置系列

SUPPLEMENTARY DEVICE

TFU 16-3 上送型送料機，送料寬度 70mm
Upper Tape Feeder, Feed Width 70mm
TFU 16-8 上送型送料機，送料寬度 200mm
Upper Tape Feeder, Feed Width 200mm

機械式防止打結裝置(標準配備)
Mechanical Untangling Device (Regular parts)

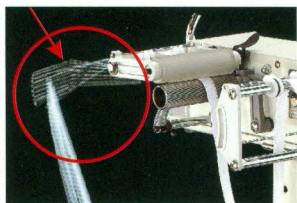


●能將箱內之鬆緊帶、橡皮帶，加予抖動，以避免糾纏打結。
●To untangle the twisted elastic Tape or cord from the box.




TFU 16-3 / UT-2 上送型送料機〔附電動型防止打結裝置〕，送料寬度70mm
Upper Tape Feeder (with untangling motor device). Feed Width 70mm



UT-2 ●TFU 16-3專用
●TFU 16-3 Only.

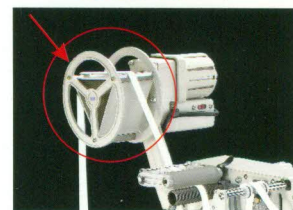

●旋轉式能更有效防止鬆緊帶打結及糾纏。
●To By the Rotational motion, effectively to untangle the twisted or gathered elastic tape.

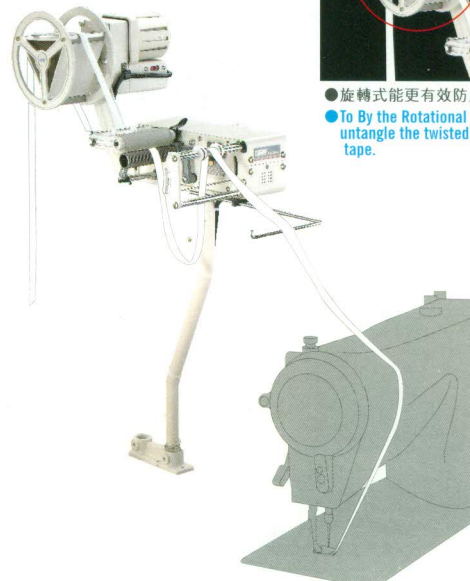

TFS 26-3 側送型送料機，送料寬度 70mm
Side Tape Feeder, Feed Width 70mm
TFS 26-8 側送型送料機，送料寬度 200mm
Side Tape Feeder, Feed Width 200mm

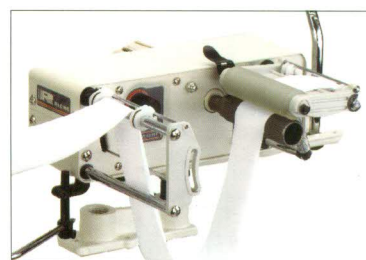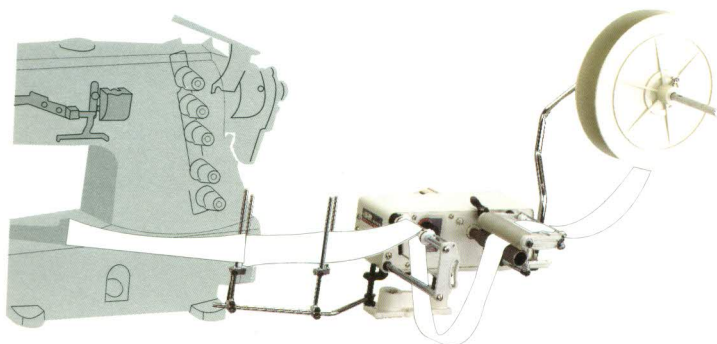


K-1 模版製作機
Pattern Cutting Machine




領子 COLLAR	
領子 COLLAR	
袖口 CUFF	

專用配件
Special Accessory

針板
Needle Plate



送齒
Feed Dog



押腳
Presser Foot






高效率省力裝置

Hi-Efficiency Labor Saving Device

RTP 氣動型滾輪擴張裝置
 Pneumatic Roller Tension Device



RTF 固定型滾輪擴張裝置
 Fixed Roller Tension Device

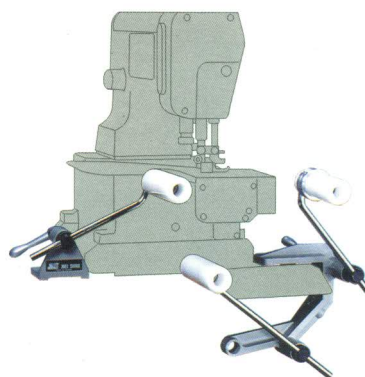

AF10 復歸型氣動開關
 Pneumatic cycle switch



AF20 保持型氣動開關
 Pneumatic hold switch



變速機
TRANSMISSION




機型 Model	S-1	P-1	P-2
入力軸轉數(最高) Input Shaft RPM (MAX. SPEED)	2000	3000	3000
出力軸轉數(最高) Output Shaft RPM (MAX. SPEED)	430	225	450
扭力(kg/cm) Torque(kg/cm)	12	15	15
重量(kgs) Weight(kgs)	2	2	2


S-1 A W D- a b c
1 2 3 4 5

- 變速機型
● Transmission Type


S-1 連續性變速機
Continuous Transmission

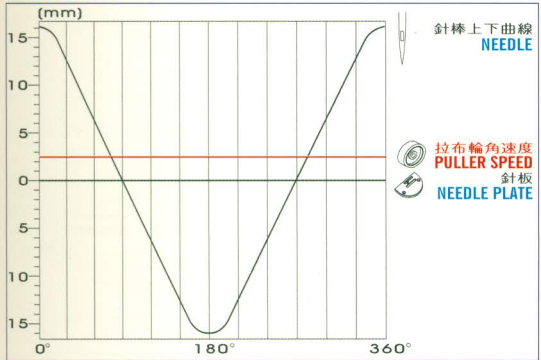

P-1 1:1 間歇性變速機
1:1 Intermittent Transmission

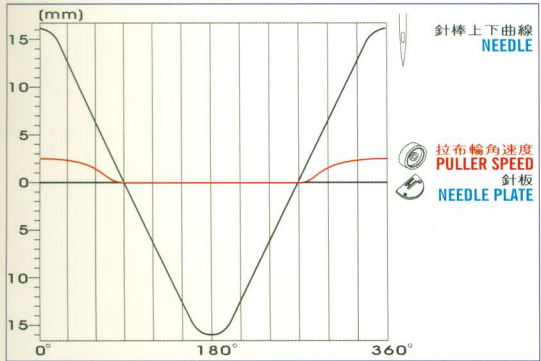


P-2 2:1 間歇性變速機
2:1 Intermittent Transmission

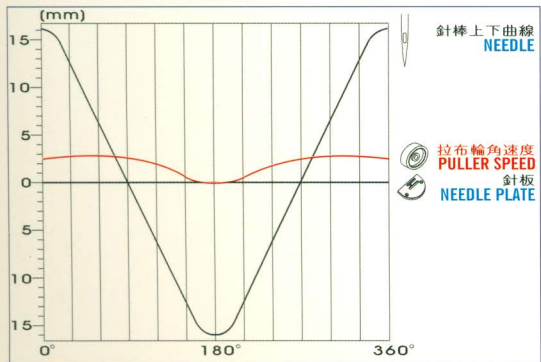


尺寸圖
Specification


單位: mm
Unit: mm

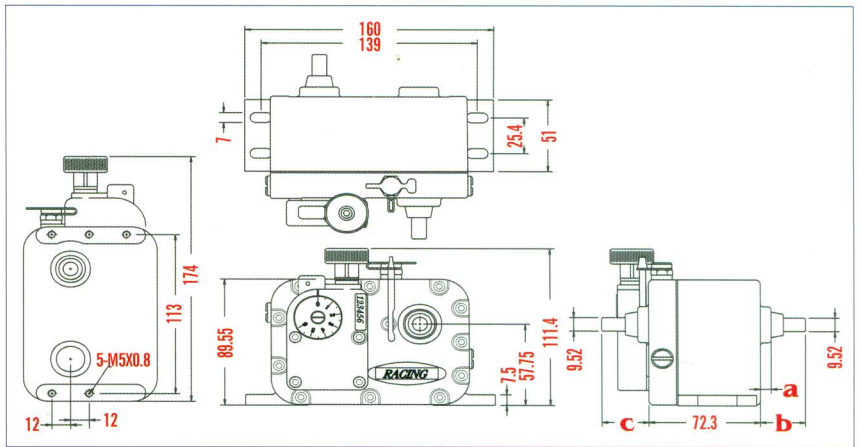

- 出力軸旋轉方向
● Rotation of Output Shaft

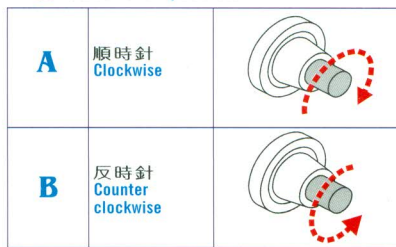

- 變速機出力軸規格
● Specification List of Input/Output Shaft

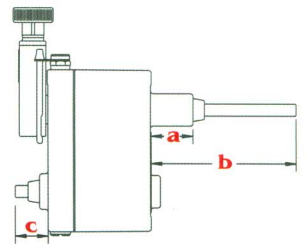

- 固定座
● Mounting Base





- 標準品
Standard Type

單位: mm
Unit: mm

機型 Type	a	b	c
S-1	★ 7	30	30
	7	88	18
	7	88	30
P-1 P-2	7	102	24
	30	102	54
	★ 30	102	24
	86	182	24
	126	182	24
	126	182	54
	86	182	54
	7	52	24

- 入力/出力軸位置
● Location of Input/Output Shaft

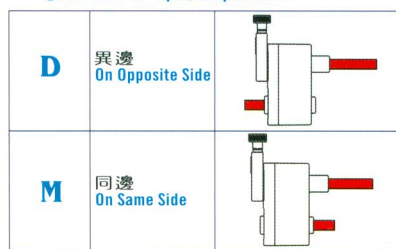

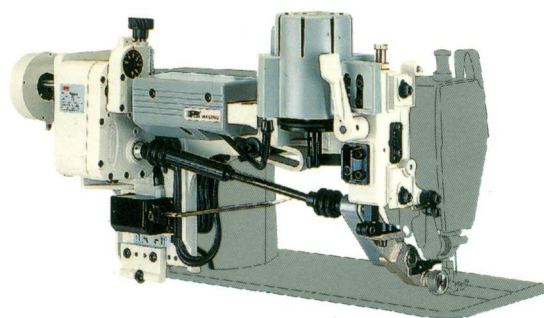

DISTRIBUTOR



Eastman Technocrafts Ltd.

A TOTAL APPAREL SOLUTION COMPANY

DHAKA OFFICE :

"City Center" (11th Floor)
Suite # 10/A-1, 90/1, Motijheel C/A
Dhaka-1000, Bangladesh
Tel : +880-2-9574049, 9586426, 7118327
Fax : +880-2-9553664
E-mail : info@eastmanbd.com

CHITTAGONG OFFICE :

Mir Mahbub Mansion (1st Floor)
304, Sk. Mujib Road
Dewanhat, Chittagong
Tel : +880-31-2858184
Telefax : +880-31-727185
E-mail : eastmanctg@eastmanbd.com

www.eastmanbd.com



瑞爾興工業有限公司

RACING SEWING MACHINE CO., LTD.

台北縣新莊市五股工業區五樓二樓8號
WU KU INDUSTRY AREA, NO.8 WU CHUNG 2 RD.,
SHIN CHUANG CITY, TAIPEI COUNTY, TAIWAN.
TEL:886-2-22981051 FAX:886-2-22997877
http://www.racing-tw.com E-mail: info@racing-tw.com